



# BRONZE LIFT CHECK VALVE RESILIENT SEATED

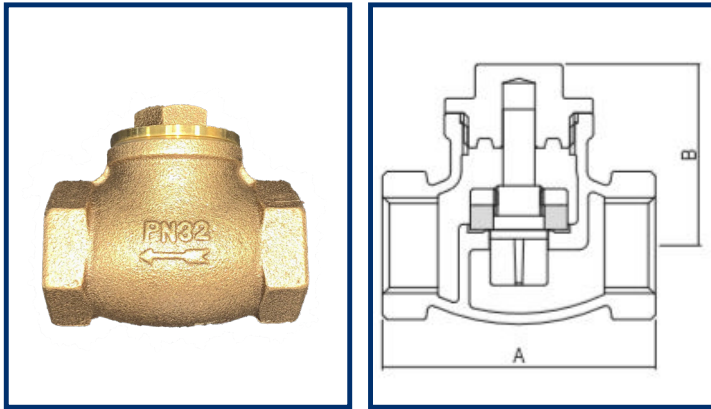

DIMENSIONS						
Size in (mm)	½(15)	¾(20)	1(25)	1¼(32)	1½(40)	2(50)
A (mm)	59	73	82	96	109	130
B (Open)(mm)	39	43	51	58	64	70
Weight (kg)	0.31	0.48	0.76	1.18	1.58	2.60

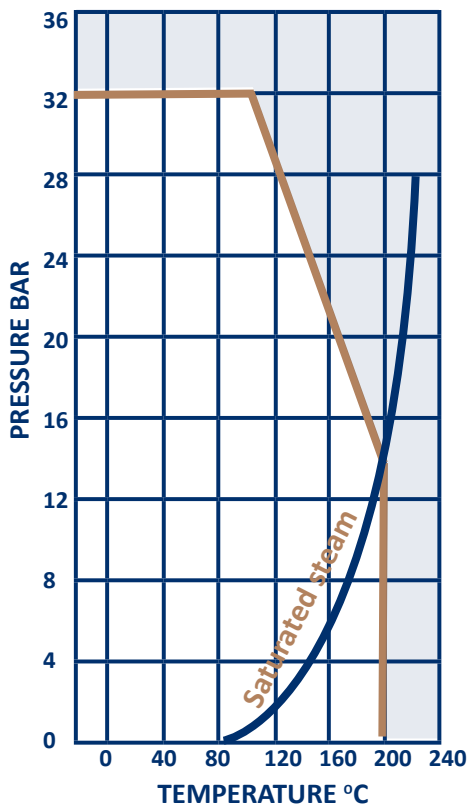

## PRESSURE/TEMPERATURE RATING

- B5154
- PN32 Series B
- 14 Bar at 198°C
- 32 Bar from - 10 to 100°C

## TEST PRESSURES (HYDRAULIC)

- Shel : 48 Bar
- Seat : 35.2 Bar
- Source : BS EN 12266-1

## SPECIFICATION

- Lift check valve
- Reinforced PTFE disc facing
- Screwed cap
- Taper threads BS EN 10226 (ISO 7 Rc)

MATERIAL SPECIFICATION			
		SPECIFICATION	
COMPONENT	MATERIAL	BS EN	ASTM
Body	Cast Bronze	1982 CC491K	B62 C84400
Cap	Cast Bronze	1982 CC491K	B62 C84400
Disc Guide	Cast Bronze	1982 CC491K	B62 C84400
Disc Holder	Brass	12165 CW617N	B455 C38000
Disc Facing	Reinforced PTFE		